

**Use of System Charging Statement** 

# MURPHY POWER DISTRIBUTION LIMITED

# USE OF SYSTEM CHARGING STATEMENT ELECTRICITY DISTRIBUTION LICENCE CONDITION 14

**EFFECTIVE FROM 1<sup>ST</sup> APRIL 2019** 

Stuart Monk
Regulation and Compliance
Manager

Gregory Addison-Smyth

a.a. gl

n and Compliance Project Director

MAIN AUTHOR Approver

DOCUMENT No.	N2-JMS-ZZ-XX-PD-Z-0213	
CURRENT REVISION	CURRENT STATUS CODE	SECURITY CLASSIFICATION
S3	P01	Public

#### REVISION HISTORY

REVI	SION	STATUS CODE	DATE	REVISION DESCRIPTION
S	0	P01.1	07/10/2017	Initial Draft
S	0	P01.2	05/06/2018	Updated with contact information
S	2	P01	19/06/2018	Issued
S	3	P01	11/09/2018	Updated information on amendments to this statement (Section 1.10)

This statement is in a form approved by the Gas and Electricity Markets Authority



# **Contents**

Validity period	
Contact Details	5
2.0 Charge Application and Definitions	
Supercustomer Charges	6
Site-Specific Billing and Payment	7
Site-Specific Billed Charges	7
Time Periods for HH Metered Properties	8
Time Periods for Pseudo HH Unmetered Properties	9
Application of Capacity Charges	9
Chargeable Capacity	9
Exceeded Capacity	9
Demand Exceeded Capacity	9
Generation Exceeded Capacity	10
Standby Capacity for Additional Security on Site	10
Minimum Capacity Levels	10
Application of Charges for Excess Reactive Power	10
Demand Chargeable Reactive Power	11
Generation Chargeable Reactive Power	11
Incorrectly Allocated Charges	11
Generation Charges For Pre-2005 Designated EHV Properties	12
Provision of Billing Data	13
Out of Area Use of System Charges	13
Licensed Distributor Network Operator Charges	13
Licence Exempt Distribution Networks	14
Full settlement metering	14
Difference metering	14
Gross Settlement	14
Net Settlement	15
3.0 Schedule of Charges for Use of the Distribution System	17
Calculation of Line Loss Factors	
Line Loss Factor Time Periods	17
Line Loss Factor Tables	
5.0 Notes for Designated EHV Properties	18
Charges for New Designated EHV Properties	



Charges For Amended Designated EHV Properties	19
Demand-side Management	19
6.0 Electricity Distribution RebatesAppendix 1 – Glossary	19
Background	26
Meter Point Administration	
Full MPAN diagram	27
Your Charges	27
Reducing Your Charges	28
Reactive Power and Reactive Power Charges	28
Site-specific EDCM Charges	29



## 1.0 INTRODUCTION

- 1.1. This statement has been generated to inform interested parties on our electricity distribution charges and the reasons behind them. It has been prepared consistent with Standard Licence Condition 14 of Murphy Power Distribution Limited (MPD) Electricity Distribution Licence. The main purpose of this statement is to provide our schedule of charges 1 for the use of our Distribution System and to provide the schedule of adjustment factors<sup>2</sup> that should be applied in Settlement to account for losses from the Distribution System. We have included guidance notes in Appendix 2 to help improve your understanding of the charges we apply.
- 1.2. Within this statement we use terms such as 'Users' and 'Customers' as well as other terms which are identified with initial capitalisation. These terms are defined in Appendix 1.
- 1.3. The charges in this statement replicate those published by the Distribution Network Operators (DNOs) where the latter have been calculated using the Common Distribution Charging Methodology (CDCM) for Low Voltage and High Voltage (LV and HV) Designated Properties. Charges for any Designated Extra High Voltage (EHV) Properties connected to the MPD network will be calculated using the MPD EHV Charging Methodology. At the date of publication MPD has no Designated EHV properties.
- 1.4. Separate charges are calculated depending on the characteristics of the connection and whether the use of the Distribution System is for demand or generation purposes. Where a generation connection is seen to support the Distribution System the charges will be negative and the Supplier will receive credits for exported energy.
- 1.5. The application of charges to premises can usually be referenced using the Charge Code contained in the charge tables. The Charge Code is applied by reference to the combination of the Line Loss Factor Class (LLFC), Profile Class (PC) and Standard Settlement Configuration (SSC) attached to a supply point. Further information on how to identify and calculate the charge that will apply for your premises is provided in the guidance notes in Appendix 2.
- 1.6. All charges in this statement are shown exclusive of VAT. Invoices will include VAT at the applicable
- 1.7. The annexes that form part of this statement are available in Microsoft .xlsx spreadsheet format. This spreadsheet contains supplementary information used for charging purposes and a simple model to assist you to calculate charges. This spreadsheet can be downloaded from our website at www.murphypowerdistribution.co.uk or requested from us on the contact information on the next page.

## VALIDITY PERIOD

- 1.8. This charging statement is valid for services provided from the effective date stated on the front of the statement and remains valid until updated by a revised version or superseded by a statement with a later effective date.
- 1.9. When using this charging statement care should be taken to ensure that the statement or statements covering the period that is of interest are used.
- Before making an amendment to MPD's Use of System Charges, they shall be approved by the 1.10. Authority. MPD shall submit a proposal to the authority in accordance with Condition 14 Part F of their distribution Licence. To achieve this MPD must:

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 4 of 30 Security Classification: Public

<sup>&</sup>lt;sup>1</sup> Charges can be positive or negative.

<sup>&</sup>lt;sup>2</sup> Also known as Loss Adjustment Factors or Line Loss Factors



i) give the Authority a revised use of system charging statement that sets out the amended charges and specifies the date to which they have effect

ii) give the Authority not less than three months' notice before the date of effect on which MPD proposes to amend its Use of System Charges in respect of any agreement for Use of System. When the Authority approves such a proposal, MPD will revise this statement and give notice of any revision to the statement to Users of our Distribution System. The latest statement can be downloaded from www.murphypowerdistribution.co.uk

### CONTACT DETAILS

1.11 If you have any questions about this statement, please contact us at the below address:

Regulation & Compliance Manager

Murphy Power Distribution Limited

Hawks Green Lane

Cannock

Staffordshire

WS11 7LH

Tel: +44 (0) 1543 466 711

Email: powerdistribution@murphygroup.co.uk

1.12. All enquiries regarding Connection Agreements and changes to maximum capacities should be addressed to:

Head of Networks

Murphy Power Distribution Limited

Hawks Green Lane

Cannock

Staffordshire

WS11 7LH

Tel: +44 (0) 1543 466 711

Email: powerdistribution@murphygroup.co.uk

1.13. For all other queries please contact our general enquiries telephone service on +44 (0) 1543 466 711 lines are open 8:00am to 5:00pm Monday to Friday.

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 5 of 30



## 2.0 CHARGE APPLICATION AND DEFINITIONS

- 2.1. The following section details how the charges in this statement are applied and billed to Users of our Distribution System.
- 2.2. We utilise two billing approaches depending on the type of metering data received:
  - The 'Supercustomer' approach is used for Non-Half-Hourly (NHH) metered, NHH unmetered or aggregated Half-Hourly (HH) metered premises
  - The 'Site-specific' approach is used for HH metered or pseudo HH unmetered premises.
- 2.3. Typically NHH metered premises are domestic and small businesses, whilst HH metered premises are larger businesses. Unmetered premises are normally streetlights.

### SUPERCUSTOMER BILLING AND PAYMENT

- Supercustomer billing and payment applies to Metering Points registered as NHH metered or NHH unmetered. The Supercustomer approach makes use of aggregated data obtained from the 'Supercustomer Distribution Use of System (DUoS) Report'.
- 2.5. Invoices are calculated on a periodic basis and sent to each User for whom MPD is transporting electricity through its Distribution System. Invoices are reconciled, over a period of approximately 14 months, to ensure the cash positions of Users and MPD are adjusted to reflect later and more accurate consumption figures.
- 2.6. The charges are applied on the basis of the LLFC assigned to a Meter Point Administration Number (MPAN), and the units consumed within the time periods specified in the statement. These time periods may not necessarily be the same as those indicated by the Time Pattern Regimes (TPRs) assigned to the SSC - specific to DNOs. All LLFCs are assigned at the sole discretion of MPD. The charges in this document are shown exclusive of VAT. Invoices take account of previous Settlement Runs and include VAT.

## SUPERCUSTOMER CHARGES

- 2.7. Supercustomer Charges are generally billed through the following components:
  - a fixed charge pence/MPAN/day; there will only be one fixed charge applied to each MPAN;
  - Unit charges pence/kWh, more than one unit charge may be apply depending on the type of tariff for which the MPAN is registered.
- 2.8. Users who wish to supply electricity to Customers whose metering system is Measurement Class A or B, and settled on Profile Class 1 through to 8 will be allocated the relevant charge structure set out in Annex 1.
- 2.9. Measurement Class A charges apply to Exit/Entry Points where NHH metering is used for Settlement.
- 2.10. Measurement Class B charges apply to Exit Points deemed to be suitable as Unmetered Supplies as permitted in the Electricity (Unmetered Supply) Regulations 2001<sup>3</sup> and where operated in accordance with BSCP5204.

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 6 of 30 Security Classification: Public

The Electricity (Unmetered Supply) Regulations 2001 available from http://www.legislation.gov.uk/uksi/2001/3263/made

<sup>&</sup>lt;sup>4</sup> Balancing and Settlement Code Procedures on unmetered supplies available from http://www.elexon.co.uk/pages/bscps.aspx



- Measurement Class F charges apply to Exit / Entry Points at domestic premises where HH metering 2.11. is used for Settlement.
- 2.12. Measurement Class G charges apply to Exit / Entry Points at non-domestic premises with whole current metering systems where HH metering is used for Settlement.
- 2.13. Identification of the appropriate charge can be made by cross-reference to the LLFC.
- 2.14. Valid Settlement PC/SSC/Meter Timeswitch Code (MTC) combinations for LLFCs where the Metering System is Measurement Class A and B are detailed in Market Domain Data (MDD).
- 2.15. Where an MPAN has an Invalid Settlement Combination, the 'Domestic Unrestricted' fixed and unit charge will be applied as default until the invalid combination is corrected. Where there are multiple SSC/TPR combinations, the default 'Domestic Unrestricted' fixed and unit charge will be applied for each invalid TPR combination.
- 2.16. The time periods for unit charges where the Metering System is Measurement Class A and B are as specified by the SSC. To determine the appropriate charge rate for each SSC/TPR a lookup table is provided in the spreadsheets which accompany this statement.
- 2.17. The time periods for unit charges where the Metering System is Measurement Class F and G are set out in the table 'Time Bands for Half Hourly Metered Properties' in Annex 1.
- 2.18. The 'Domestic Off-Peak' and 'Small Non-Domestic Off-Peak' charges are additional to either an unrestricted or a two-rate charge.

### SITE-SPECIFIC BILLING AND PAYMENT

- Site-specific billing and payment applies to Measurement Class C, D and E Metering Points are settled as Half Hourly (HH) metered. The site-specific billing and payment approach to Use of System (UoS) billing makes use of HH metering data received through settlement.
- 2.20. Invoices are calculated on a periodic basis and sent to each User, for whom MPD is transporting electricity through its Distribution System. Where an account is based on estimated data, the account shall be subject to any adjustment that may be necessary following the receipt of actual data from the User.
- 2.21. The charges are applied on the basis of the LLFCs assigned to the MPAN (or the Meter System Identifier (MSID) for Central Volume Allocation (CVA) sites), and the units consumed within the time periods specified in this statement. Where MPANs have not been associated, for example when multiple points of connection fed from different sources are used for a single site, the relevant number of fixed charges will be applied.
- 2.22. All LLFCs are assigned at the sole discretion of MPD, based on the tariff application rules set out in the appropriate charging methodology or elsewhere in this statement. Where an incorrectly applied LLFC is identified, MPD may at its sole discretion apply the correct LLFC and/or charges. Please refer to section 'Incorrectly Allocated Charges' if an allocated LLFC or tariff is believed to be incorrect.

#### SITE-SPECIFIC BILLED CHARGES

- 2.23. Site-Specific billed charges may include the following components:
  - a fixed charge pence/MPAN/day or pence/MSID/day;
  - a capacity charge, pence/kVA/day for Maximum Import Capacity (MIC) and/or Maximum Export Capacity (MEC);
  - an excess capacity charge, pence/kVA/day, if a site exceed its MIC and/or MEC;
  - unit Charges, pence/kWh, more than one unit charge may be applied; and

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 7 of 30 Security Classification: Public



- an excess reactive power charge, pence/kVArh, for each unit in excess of the reactive charge
- 2.24. Users who wish to supply electricity to Customers whose Metering System is Measurement Class C, D or E or is settled via CVA will be allocated the relevant charge structure dependent upon the voltage and location of the metering point.
- 2.25. Measurement Class C, E or CVA charges apply to Exit/Entry points where HH metering, or an equivalent meter, is used for Settlement purposes, for non-domestic sites that have Current Transformer (CT) metering.
- 2.26. Measurement Class D charges apply to Exit/entry points deemed to be suitable as Unmetered Supplies as permitted in the Electricity (Unmetered Supply) Regulations 2001<sup>5</sup> and where operated in accordance with BSC Procedure 5206.
- 2.27. Fixed charges are generally levied on a pence per MPAN or pence per MSID basis. Where two or more HH MPANs/MSIDs are located at the same point of connection (as identified in the connection agreement), with the same LLFC, and registered to the same Supplier, only one daily fixed charge will be applied.
- 2.28. LV & HV Designated Properties will be charged in accordance with the CDCM and allocated the relevant charge structure set out in Annex 1.
- 2.29. LV and HV Designated Properties which utilise a combination of Intermittent or Non-Intermittent generation technologies metered through a single MPAN/MSID will be allocated the Non-Intermittent generation tariff unless the combined installed capacity, as evidence in ratings contained in the Connection Agreement, for Intermittent generation technologies is higher than the combined installed capacity for Non-Intermittent generation technologies, in which case the Intermittent generation tariff will be allocated.
- 2.30. Designated EHV Properties will be charged in accordance with the EHV Distribution Charging Methodology (EDCM) and allocated the relevant charge structure set out in Annex 2. For clarity, MPD does not currently have any Designated EHV properties.
- 2.31. Where LV and HV Designated Properties or Designated EHV Properties have more than one point of connection (as identified in the Connection Agreement) then separate charges will be applied to each point of connection.
- 2.32. Due to the seasonal nature of charges for Unmetered Supplies, changes between Measurement Classes B and D (or vice versa) shall not be agreed except with effect from 1st April in any charging year.

#### TIME PERIODS FOR HH METERED PROPERTIES

- The time periods for the application of unit charges to LV and HV Designated Properties that are HH 2.33. metered are detailed in Annex 1. MPD has not issued a notice to change the time bands.
- 2.34. The time periods for the application of unit charges to Designated EHV Properties are detailed in Annex 2. MPD has not issued a notice to change the time bands.

Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 8 of 30 Status: Issued Security Classification: Public

<sup>&</sup>lt;sup>5</sup> The Electricity (Unmetered Supply) Regulations 2001 available from http://www.legislation.gov.uk/uksi/2001/3263/made

<sup>&</sup>lt;sup>6</sup> Balancing and Settlement Code Procedures on unmetered supplies and available from <a href="http://www.elexon.co.uk/pages/bscps.aspx">http://www.elexon.co.uk/pages/bscps.aspx</a>



## TIME PERIODS FOR PSEUDO HH UNMETERED PROPERTIES

The time periods for the application of unit charges to connections that are Pseudo HH Metered are detailed in Annex 1. MPD has not issued a notice to change the time bands.

## APPLICATION OF CAPACITY CHARGES

The following sections explain the application of Capacity Charges and Exceeded Capacity Charges.

### CHARGEABLE CAPACITY

- The Chargeable Capacity is, for each billing period, the highest of the MIC/MEC as detailed below.
- 2.38. The MIC/MEC will be agreed with MPD at the time of connection or pursuant to a later change in requirements. Following such an agreement (be it at the time of connection or later) no reduction in MIC/MEC will be allowed for a period of one year (12 months).
- 2.39. Reductions to the MIC/MEC may only be permitted once in a 12 month period and no retrospective changes will be allowed. Where MIC/MEC is reduced the new lower level will be agreed with reference to the level of the Customer's maximum demand. The new MIC/MEC will be applied from the start of the next billing period after the date that the request was received. It should be noted that where a new lower level is agreed, the original capacity may not be available in the future without the need for network reinforcement and associated charges.
- 2.40. In the absence of an agreement the chargeable capacity, save for error or omission, will be based on the last MIC and/or MEC previously agreed by the distributor for the relevant premises' connection. A Customer can seek to agree or vary the MIC and/or MEC by contacting MPD using contact details noted within this statement.

### **EXCEEDED CAPACITY**

Where a customer takes additional unauthorised capacity over and above the MIC/MEC, the excess will be classed as Exceeded Capacity. The exceeded portion of the capacity will be charged at the excess capacity charge p/kVA/day rate, based on the difference between the MIC/MEC and the actual capacity used. This will be charged for the full duration of the month in which the breach occurs.

## DEMAND EXCEEDED CAPACITY

Demand exceeded capacity =  $max(2 \times \sqrt{AI^2 + max(RI, RE)^2} - MIC, 0)$ 

Where:

AI = Active Import (kWh)

RI = Reactive Import (kVArh)

RE = Reactive Export (kVArh)

MIC = Maximum Import Capacity (kVA)

2.42. Only reactive import and reactive export values occurring at times of active import are used in the calculation. Where data from two or more MPAN's is aggregated for billing purposes the HH consumption values are submitted prior to the calculation above. For sites which are importing and exporting in the same HH, i.e. where active import is not equal to zero and active export is not equal to zero, use zero for reactive import and reactive export when calculating capacity taken.

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 9 of 30 Security Classification: Public



2.43. This calculation is completed for every half hour and the maximum value from the billing period is applied.

## GENERATION EXCEEDED CAPACITY

Generation exceeded capacity =  $max(2 \times \sqrt{AE^2 + max(RI, RE)^2} - MEC, 0)$ 

Where:

AE = Active Export (kWh)

RI = Reactive Import (kVArh)

RE = Reactive Export (kVArh)

MEC = Maximum Export Capacity (kVA)

- 2.44. Only reactive import and reactive export values occurring at times of active export are used in the calculation. Where data for two or more MPAN's is aggregated for billing purposes the HH consumption values occurring at times of KWh export are summated prior to the calculation above. For sites which are importing and exporting in the same HH, i.e. where the active import is not equal to zero and active export is not equal to zero, use zero for reactive import and reactive export when calculating capacity taken.
- 2.45. This calculation is completed for every half hour and maximum value from the billing period is applied.

### STANDBY CAPACITY FOR ADDITIONAL SECURITY ON SITE


2.46. Where standby capacity charges are applied, the charge will be set at the same rate as that applied to normal MIC. Where, at a customer's request, for additional security of supplies requiring sterilisation of capacity at two different sources of supply, we reserve the right to charge for the capacity held at each source.

#### MINIMUM CAPACITY LEVELS

2.47. There is no minimum capacity threshold.

#### APPLICATION OF CHARGES FOR EXCESS REACTIVE POWER

- 2.48. Where an individual HH metered MPAN's reactive power (measured in kVArh) at LV and HV Designated Properties exceeds 33% of total active power (measured in kWh), excess reactive power charges will apply. This threshold is equivalent to an average power factor of 0.95 during the period. Any reactive units in excess of the 33% threshold are charged at the rate appropriate to the particular charge.
- 2.49. Power Factor is calculated as follows:



Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 10 of 30



2.50. The chargeable Reactive Power is calculated as follows:

## DEMAND CHARGEABLE REACTIVE POWER

Demand chargeable kVArh = 
$$\max \left( \max(RI,RE) - \left( \sqrt{\frac{1}{0.95^2} - 1} \times AI \right), 0 \right)$$

Where:

AI = Active Import (kWh)

RI = Reactive Import (kVArh)

RE = Reactive Export (kVArh)

- 2.51. Only reactive import and reactive export values occurring at times of active import are used in the calculation. Where data for two or more MPANs is aggregated for billing purposes the HH consumption values are summated prior to the calculation above. For sites which are importing and exporting in the same HH i.e. where active import is not equal to zero and active export is not equal to zero, no calculation for the HH is made and the result for that HH would be zero.
- 2.52. The square root calculation will be to two decimal places.
- 2.53. This calculation is completed for every half hour and the values summated over the billing period.

## GENERATION CHARGEABLE REACTIVE POWER

Generation chargeable kVArh = 
$$\max \left( \max(RI,RE) - \left( \sqrt{\frac{1}{0.95^2} - 1} \times AE \right), 0 \right)$$

Where:

AE = Active Export (kWh)

RI = Reactive Import (kVArh)

RE = Reactive Export (kVArh)

- 2.54. Only reactive import and reactive export values occurring at times of active export are used in the calculation. Where data for two or more MPANs is aggregated for billing purposes the HH consumption values are summated prior to the calculation above. For sites which are importing and exporting in the same HH i.e. where active import is not equal to zero and active export is not equal to zero, no calculation for that HH is made and the result for that HH would be zero.
- 2.55. The square root calculation will be to two decimal places.
- 2.56. This calculation is completed for every half hour and the values summated over the billing period.

#### INCORRECTLY ALLOCATED CHARGES

2.57. It is our responsibility to apply the correct charges to each MPAN/MSID. The allocation of charges is based on the voltage of connection, import/export details, metering information and for some tariffs, the metering location. Where an MAPN/MSID is used for export purposes, the type of generation (Intermittent or Non-Intermittent) also determines the allocation of charges.



- We are responsible for deciding the voltage of connection. Generally, this is determined by where the 2.58. metering is located and where responsibility for the electrical equipment transfers from us to the connected Customer. This is normally established when the MPAN/MSID is created and will include information about whether the MPAN/MSID is for import or export purposes. Where an MPAN/MSID is used for export purposes the type of generation (intermittent or non-intermittent) will also be determined.
- 2.59. The Supplier determines, and provides us with metering information and data. This enables us to allocate the charges where there is more than one charge per voltage level. This metering information and data is likely to change over time if, for example, a Supplier changes from a two rate meter to a single rate meter. When we are notified this has happened we will change the allocation of charges accordingly.
- 2.60. Where it has been identified that a charge is likely to be incorrectly allocated due to the wrong voltage of connection (or import/export details or metering location), then a correction request to investigate the applicable charges should be made to us. Requests from persons other than the Customer or the current Supplier must be accompanied by a Letter of Authority from the Customer; the current Supplier must also acknowledge that they are aware that a request has been made. Any request must be supported by an explanation of why it is believed that the current charge is wrongly applied along with supporting information, including, where appropriate photographs of metering positions or system diagrams. Any request to correct the current charge that also includes a request to backdate the correction must include justification as to why it is considered appropriate to backdate the change.
- 2.61. If it has been identified that a charge has been incorrectly allocated due to the metering information and/or data, then a correction request should be made to the Supplier.
- 2.62. An administration charge (covering our reasonable costs) may be made if a technical assessment or site visit is required, but we will not apply any charge where we agree to the change request.
- 2.63. Where we agree that an MPAN/MSID/LLFC/charge has been assigned to the wrong voltage level then we will correct it by allocating the correct set of charges for that voltage level. Any adjustment for incorrectly applied charges will be as follows:
  - Any credit or additional charge will be issued to the Supplier(s) who were effective during the period of the change.
  - The correction will be applied from the date of the request, back to the date of the incorrect allocation or, up to the maximum period specified by: the Limitation Act (1980), in England and Wales, which covers a six year period; or, the Prescription and Limitation (Scotland) Act 1973, which covers a five year period; whichever is the shorter.
- 2.64. Should we reject the request a justification will be provided to the requesting Party.
- 2.65. We shall not unreasonably withhold or delay any agreement to correct the charges applied and would expect to reach agreement within three months from the date of request.

# GENERATION CHARGES FOR PRE-2005 DESIGNATED EHV **PROPERTIES**

- 2.66. Designated EHV Properties that were connected to the distribution system under a pre-2005 connection charging policy are eligible for exemption from UoS charges for generation unless one of the following criteria has been met:
  - 25 years have passed since their first energisation/connection date (i.e. Designated EHV Properties with connection agreements dated prior to 1st April 2005, and for which 25 years has passed since their first energisation/connection date will receive Use of System Charges for

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 12 of 30 Security Classification: Public



- generation from the next charging year following the expiry of their 25 years exemption, (starting 1st April), or
- the person responsible for the Designated EHV Property has provided notice to us that they wish to opt in to UoS charges for generation.

If a notice to opt in has been provided there will be no further opportunity to opt out.

2.67. Furthermore, if an exempt customer makes an alteration to its export requirement then the customer may be eligible to be charged for the additional capacity required or energy imported or exported. For example, where a generator increases its export capacity the incremental increase in export capacity will attract UoS charges as with other non-exempt generators.

#### PROVISION OF BILLING DATA

- 2.68. Where HH metering data is required for UoS charging and this is not provided in accordance with the Balancing and Settlement Code (BSC) or the Distribution Connection and Use of System Agreement (DCUSA), such metering data shall be provided to us by the User of the system in respect of each calendar month within five working days of the end of that calendar month.
- 2.69. The metering data shall identify the amount consumed and/or produced energy in each half hour of each day and shall separately identify active and reactive import and export. Metering data provided to us shall be consistent with that received through the metering equipment installed.
- 2.70. Metering data shall be provided in an electronic format specified by us from time to time and, in the absence of such specification, metering data shall be provided in a comma-separated text file in the format of Master Registration Agreement (MRA) data flow D0036 (as agreed with us). The data shall be emailed to powerdistribution@murphygroup.co.uk, or sent via the Data Transfer Network (DTN).
- 2.71. We require details of reactive power imported or exported to be provided for all Measurement Class C (mandatory HH metered) sites and for Measurement Class E (elective HH metered sites). It is also required for CVA sites and Exempt Distribution Network boundaries with difference metering. MPD reserves the right to levy a charge on Users who fail to provide such reactive data. In order to estimate missing reactive data, a Power Factor of 0.9 lag will be applied to the active consumption in any half hour.

### OUT OF AREA USE OF SYSTEM CHARGES

2.72. MPD does not have Distribution Services Area.

#### LICENSED DISTRIBUTOR NETWORK OPERATOR CHARGES

- 2.73. Licensed Distribution Network Operator (LDNO) charges are applied to LDNOs who operate Embedded Networks within **MPD** Networks.
- 2.74. The charge structure for LV and HV Designated Properties embedded in Networks operated by LDNOs will mirror the structure of the 'all-the-way' charge and is dependent upon the voltage of connection of each Embedded Network to the MPD Network. The same charge elements will apply as those that match the LDNO's end customer Charges. The relevant charge structures are set out in Annex 4.
- 2.75. Where a NHH metered MPAN has an Invalid Settlement combination, the 'LDNO HV: Domestic Unrestricted' fixed and unit charges will be applied as default until the invalid combination is corrected. Where there are multiple SSC/TPR combinations, the default 'LDNO HV: Domestic Unrestricted' fixed and unit charge will be applied for each invalid TPR combination.

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 13 of 30



- The charge structure for Designated EHV Properties embedded in Networks operated by LDNOs will 2.76. be calculated individually using the EDCM. The relevant charge structures are set out in Annex 2.
- 2.77. For Nested Networks the relevant charging principles set out in DCUSA Schedule 21 will apply.

### LICENCE EXEMPT DISTRIBUTION NETWORKS

- The Electricity and Gas (Internal Market) Regulations 2011<sup>7</sup> introduced new obligations on owners of licence exempt distribution networks (sometimes called private networks) including a duty to facilitate access to electricity and gas Suppliers for Customers within those networks.
- 2.79. When Customers (both domestic and commercial) are located within a licence exempt distribution network and require the ability to choose their own Supplier, this is called 'third party access'. These embedded customers will require an MPAN so that they can have their electricity supplied by a Supplier of their choice.
- 2.80. Licence exempt distribution networks owners can provide third party access using either full Settlement metering or the difference metering approach.

### FULL SETTLEMENT METERING

- This is where a licence exempt distribution network is set up so that each embedded installation has an MPAN and Metering System and therefore all customers purchase electricity from their chosen Supplier. In this case there are no Settlement Metering Systems at the boundary between the licensed Distribution System and the exempt distribution network.
- 2.82. In this approach our UoS charges will be applied to each MPAN.

## DIFFERENCE METERING

- This is where one or more, but not all, Customers on a licence exempt distribution network choose their own Supplier for electricity supply to their premise. Under this approach the customers requiring third party access on the exempt distribution network will have their own MPAN and must have a HH Metering System.
- 2.84. Unless agreed otherwise, our UoS charges will be applied using gross settlement/net settlement or both.

#### GROSS SETTLEMENT

- Where one of MPD MPANs (prefixed '34') is embedded within a Licence Exempt Distribution Network connected to our Distribution System, and difference metering is in place for Settlement purposes and we receive gross measurement data for the boundary MPAN, we will continue to charge the boundary MPAN Supplier for use of our Distribution System. No charges will be levied by us directly to the Customer or Supplier of the embedded MPAN(s) connected within the licence exempt distribution network.
- We require that gross metered data for the boundary of the connection is provided to us. Until a new 2.86. industry data flow is introduced for the sending of such gross data, gross metered data shall:
  - be provided in a text file in the format of the D0036 MRA data flow

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 14 of 30 Security Classification: Public

<sup>&</sup>lt;sup>7</sup> The Electricity and Gas (Internal Market) Regulations 2011 available from http://www.legislation.gov.uk/uksi/2011/2704/contents/made



- the text file shall be emailed to powerdistribution@murphygroup.co.uk
- the title of the email should also contain the phrase "gross data for difference metered private network"
- the text file and the title of the email shall contain the metering reference specified by us in place of the Settlement MPAN, i.e. a dummy alphanumeric reference to enable the relating of the gross metered data to a given boundary MPAN;
- the text filename shall be formed of the metering reference specified by us, followed by a hyphen, and followed by a timestamp in the format YYYYMMDDHHMMSS and followed by ".txt"
- 2.87. For the avoidance of doubt, the reduced difference metered measurement data for the boundary connection that is to enter Settlement should continue to be sent using the Settlement MPAN.

## **NET SETTLEMENT**

- 2.88. Where one of our MPANs (prefixed '34') is embedded within a Licence Exempt Distribution Network connected to one of our Distribution Systems, and difference metering is in place for Settlement purposes, and we do **not** receive gross measurement data for the boundary MPAN, we will charge the boundary MPAN Supplier based on the net measurement for use of our Distribution System. Charges will also be levied directly to the Supplier of the embedded MPAN(s) connected within the licence exempt distribution network based on the actual data received.
- 2.89. The charges applicable for an embedded MPAN are unit charges only. These will be the same values as those at the voltage of connection to the Licence Exempt Distribution Network and are shown in Annex 1. The fixed charge and capacity charge, at the agreed MIC/MEC of the boundary MPAN, will be charged to the boundary MPAN supplier.

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 15 of 30



# 3.0 SCHEDULE OF CHARGES FOR USE OF THE DISTRIBUTION SYSTEM

- 3.1. Tables listing the charges for the distribution of electricity under UoS are published in the annexes to this document.
- 3.2. These charges are also listed in a spreadsheet which is published with this statement and can be downloaded from http://www.murphypowerdistribution.co.uk
- 3.3 Annex 1 contains charges to LV and HV designated Properties.
- 3.4. Annex 2 contains the charges applied to our Designated EHV Properties and charges applied to LDNOs for Designated EHV Properties connected within their embedded Distribution System.
- 3.5. Annex 3 contains details of any preserved and additional charges that are valid at this time. Preserved charges are mapped to an appropriate charge and are closed to new Customers.
- 3.6. Annex 4 contains the charges applied to LDNOs in respect of LV and HV Designated Properties connected in their embedded Distribution System.
- 3.7. Annex 5 contains the Line Loss Factors for the losses of electricity through its distribution to the customer (see Section 4.)



## 4.0 SCHEDULE OF LINE LOSS FACTORS

# ROLE OF LINE LOSS FACTORS IN THE SUPPLY OF **ELECTRICITY**

- 4.1. Electricity entering or exiting Distribution Systems is adjusted to take account of energy that is lost8 as it is distributed through the network. This adjustment does not affect distribution charges but is made to ensure the energy bought or sold by a User, from/to a Customer, accounts for energy lost as part of distributing energy to and from the User's premises.
- 4.2. We are responsible for calculating the Line Loss Factors9 (LLFs) and providing these factors to Elexon Limited. Elexon Limited is the company that manages the BSC. This Code covers the governance and rules for the balancing and settlement arrangements of electricity in the UK.
- 4.3. Annex 5 provides the LLFs which must be used to adjust the Metering System volumes to take account of losses on the Distribution Network.

### CALCULATION OF LINE LOSS FACTORS

- LLFs are calculated in accordance with BSC Procedure (BSCP) 128. BSCP128 determines the principles by which Licenced Distribution System Operators (LDSOs) must comply with when calculating LLFs. It also defines the procedure and timetable by which LLFs are reviewed and submitted by each LDSO.
- 4.5. LLFs are calculated for a set number of time periods during the year, using a generic method or a sitespecific method. The generic method is used for sites connected at LV or HV and the site specific method is used for sites connected at EHV or where a request for site specific LLFs has been agreed. Generic LLFs will be applied to all new EHV sites until sufficient data is available for a site specific calculation.
- 4.6. The definition of EHV used for LLF purposes differs from the definition used for defining Designated EHV Properties that is used in the EDCM. The definition used for LLF purposes can be found in our LLF methodology.
- 4.7. The Elexon website (http://www.elexon.co.uk/reference/technical-operations/losses/) contains more information on LLFs. This page also has links to BSCP 128 and to our LLF methodology.

## LINE LOSS FACTOR TIME PERIODS

LLFs are calculated for a set number of time periods during the year and are detailed in Annex 5.

### LINE LOSS FACTOR TABLES

When using the LLF tables in Annex 5 reference should be made to the LLFC allocated to the MPAN 4.9. to find the appropriate LLF.

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 17 of 30

<sup>&</sup>lt;sup>8</sup> Energy can be lost for technical and non-technical reasons and losses normally occur by heat dissipation through power flowing in conductors and transformers. Losses can also reduce if a customer's action reduces power flowing in the distribution network. This might happen when a customer generates electricity and the produced energy is consumed locally. <sup>9</sup> Also referred to as Line Loss Adjustment Factors



## PUBLICATION OF LINE LOSS FACTORS

- 4.10. The LLFs used in Settlement are published on the Elexon Limited portal on their website <a href="https://www.elexonportal.co.uk">https://www.elexonportal.co.uk</a> and contains the LLFs in standard industry data formats (D0265) and in a summary form. A user guide with details on registering and using the portal can be downloaded from <a href="https://www.elexonportal.co.uk/userguide">https://www.elexonportal.co.uk/userguide</a>
- 4.11. The BSCP128 sets out the timetable by which LLFs are submitted and audited. The submission and audit occurs between September and December in the year prior to the LLFs becoming effective. Only after the completion of the audit at the end of December and with approval from the BSC are the final LLFs published.
- 4.12 Illustrative LLFs based on the latest LLFs are provided in Annex 5 of this statement. These illustrative LLFs are provided with reference to metered voltage or associated LLFC for generic LLFs and by reference to the LLFCs for site specific LLFs. Each LLF is applicable to a defined time period.
- 4.13 As this charging statement is published a complete year before the LLFs have been published it is important to note that the LLFs provided in this statement are for illustration only and may be revised during the BSCP128 process.
- 4.14 When using the tables in Annex 5, reference should be made to the LLFC allocated to the MPAN to find the appropriate values.



## 5.0 NOTES FOR DESIGNATED EHV PROPERTIES

## EDCM NETWORK GROUP COSTS

- MPD does not currently have any Designated EHV Properties. 5.1.
- 5.2. These are illustrative of the modelled costs at the time that this statement was last reviewed and published. A new connection will result in changes to current network utilisations, which will then form the basis of future prices; the charge determined in this statement will not necessarily be the charge in subsequent years because of the interaction between new and existing network connections and any other changes made to our Distribution System which may affect charges.

### CHARGES FOR NEW DESIGNATED EHV PROPERTIES

- Charges for any new Designated EHV Properties calculated after publication of the current statement will be published on our website in an addendum to that statement as and when necessary. The addendum will include charge information of the type found in Annex 2, and LLFs as found in Annex
- 5.4. The form of the addendum is detailed in Annex 6 of this statement.
- 5.5. The addendum will be sent to relevant DCUSA parties (i.e. the registered Supplier) and where requested the Customer. The addendum will include charge information that under enduring circumstances would be found in Annex 2 and line loss factors that would normally be found in Annex
- The new Designated EHV Properties charges will be added to Annex 2 when this next full statement 5.6. is reviewed and published.

#### CHARGES FOR AMENDED DESIGNATED EHV PROPERTIES

Where an existing Designated EHV Property is modified and energised in the charging year, we may 5.7. revise the EDCM charges for the modified Designated EHV Property. If revised charges are appropriate, an addendum will be sent to relevant DCUSA parties and published as a revised 'Schedule of Charges and Other Tables' spreadsheet on our website. The modified Designated EHV Property charges will be added to Annex 2 in the next full statement released.

#### DEMAND-SIDE MANAGEMENT

Not Used 5.8.

## 6.0 ELECTRICITY DISTRIBUTION REBATES

We have neither given nor announced any DUoS rebates to Users in the 12 months preceding the date of publication of this revision of the statement.

# 7.0 ACCOUNTING AND ADMINISTRATION SERVICES

- We reserve the right to impose payment default remedies. The remedies are as set out in DCUSA 7.1. where applicable or else as detailed in the following paragraphs.
- 7.2. If any invoices that are not subject to a valid dispute remain unpaid on the due date, late payment interest (calculated at base rate plus 8%) and administration charges may be imposed.

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 19 of 30



7.3. Our administration charges are detailed in the following table. These charges are set at a level which is in line with the Late Payment of Commercial Debts (Interest) Act 1998<sup>10</sup>;

Size of Unpaid Debt	Late Payment Fee
Up to £999.99	£40.00
£1,000 to £9,999.99	£70.00
£10,000 or more	£100.00

# 8.0 CHARGES FOR ELECTRICAL PLANT PROVIDED ANCILLARY TO THE GRANT OF USE OF SYSTEM

8.1. None

Revision S3 **Document Number: N2-JMS-ZZ-XX-PD-Z-0213** Page 20 of 30 Status: Issued Security Classification: Public

<sup>&</sup>lt;sup>10</sup> Late Payment of Commercial Debts (Interest) Act 1998 available from https://www.legislation.gov.uk/ukpga/1998/20/contents



# **APPENDIX 1 – GLOSSARY**

The following definitions, which can extend to grammatical variations and cognate expressions, are included to aid understanding and do not form part of the application of charges:

Term		Defi	nition	
All-the-way Charge	user in MSID a a Cust	ge that is applicable to an end this context is a Supplier/Use and is using the Distribution Sy omer.	user rather than an LDNO. An end r who has a registered MPAN or rstem to transport energy on behalf of	
Balancing and Settlement Code (BSC)	and se	The BSC contains the governance arrangements for electricity balancing and settlement in Great Britain. An overview document is available from www.elexon.co.uk/ELEXON Documents/trading_arrangements.pdf		
Common Distribution Charging Methodology (CDCM)	require	The CDCM used for calculating charges to Designated Properties as required by standard licence condition 13A of the Electricity Distribution Licence.		
Central volume allocation (CVA)	As def	ined in the BSC.		
Designated EHV Properties Designated Properties Distributor IDs	A person to whom a User proposes to supply, or for the time being supplies, electricity through an exit point, or from who, a User or any relevant exempt supplier, is entitled to recover charges, compensation or an account of profits in respect of electricity supplied through an exit point;  Or  A person from whom a User purchases, or proposes to purchase, electricity, at an entry point (who may from time to time be supplied with electricity as a Customer of that User (or another electricity supplier) through an exit point).  As defined in standard condition 13B of the Electricity Distribution Licence.  As defined in standard condition 13A of the Electricity Distribution Licence.  These are unique IDs that can be used, with reference to the MPAN, to			
	on thei	r website.	other network operators can be found	
	ID	Distribution Services Area	Operator	
	10	Eastern Power Networks	UK Power Networks	
	11	East Midlands	Western Power Distribution	
	12	London Power Networks	UK Power Networks	
	13	Merseyside and North Wales	Scottish Power	
	14	Midlands	Western Power Distribution	
	15	Northern	Northern Powergrid	
	16	AL II VAZ		
	10	North Western	Electricity North West	
	17	Scottish Hydro Electric	Electricity North West Scottish Hydro Electric Power Distribution plc	
			Scottish Hydro Electric Power	
	17	Scottish Hydro Electric  South Scotland  South Eastern Power	Scottish Hydro Electric Power Distribution plc	
	17 18 19 20	Scottish Hydro Electric  South Scotland South Eastern Power Networks Southern Electric	Scottish Hydro Electric Power Distribution plc Scottish Power UK Power Networks  Southern Electric Power Distribution plc	
	17 18 19 20 21	Scottish Hydro Electric  South Scotland South Eastern Power Networks Southern Electric  South Wales	Scottish Hydro Electric Power Distribution plc Scottish Power UK Power Networks  Southern Electric Power Distribution plc Western Power Distribution	
	17 18 19 20 21 22	Scottish Hydro Electric  South Scotland South Eastern Power Networks Southern Electric  South Wales South Western	Scottish Hydro Electric Power Distribution plc Scottish Power UK Power Networks  Southern Electric Power Distribution plc Western Power Distribution Western Power Distribution	
	17 18 19 20 21 22 23	Scottish Hydro Electric  South Scotland South Eastern Power Networks Southern Electric  South Wales South Western Yorkshire	Scottish Hydro Electric Power Distribution plc Scottish Power UK Power Networks  Southern Electric Power Distribution plc Western Power Distribution Western Power Distribution Northern Powergrid	
	17 18 19 20 21 22	Scottish Hydro Electric  South Scotland South Eastern Power Networks Southern Electric  South Wales South Western	Scottish Hydro Electric Power Distribution plc Scottish Power UK Power Networks  Southern Electric Power Distribution plc Western Power Distribution Western Power Distribution	



Term		Defir	nition
Term	26	All	Energetics Electricity Ltd
	27	All	The Electricity Network Company
	21	Δ"	Ltd
	29	All	Harlaxton Energy Networks Ltd
	30	All	Peel Electricity Networks Ltd
	31	All	UK Power Distributions Ltd
	32	All	Utility Distribution Networks Ltd
	33	All	Eclipse Power Networks Ltd
	34	All	Murphy Power Distribution Limited
	35	All	Fulcrum Electricity Assets Limited
Distribution Connection and Use of System Agreement (DCUSA)	The DCUSA is a multi-party contract between the licensed electricity distributors, suppliers, generators and Offshore Transmission Owners of Great Britain.  It is a requirement that all licensed electricity distributors and suppliers become parties to the DCUSA.		
Distribution Network Operator (DNO)	An electricity distributor that operates one of the 14 distribution services areas and in whose electricity distribution licence the requirements of Section B of the standard conditions of that licence have effect.		
Distribution Services Area	The area specified by the Gas and Electricity Markets Authority within which each DNO must provide specified distribution services.		
Distribution System	The system consisting (wholly or mainly) of electric lines owned or operated by an authorised distributor that is used for the distribution of electricity from:  • Grid Supply Points or generation sets or other entry points to the points of delivery to:  • Customers or Users or any transmission licensee in its capacity as operator of that licensee's transmission system or the Great Britain (GB) transmission system and includes any remote transmission assets (owned by a transmission licensee within England and Wales)  that are operated by that authorised distributor and any electrical plant, electricity meters, and metering equipment owned or operated by it in connection with the distribution of electricity, but does not include any part		
EHV Distribution Charging	connection with the distribution of electricity, but does not include any part of the GB transmission system.  The EDCM used for calculating charges to Designated EHV Properties as		
Methodology (EDCM)	required by standard licence condition 13B of the Electricity Distribution Licence.		
Electricity Distribution Licence	The Electricity Distribution Licence granted or treated as granted pursuant to section 6(1) of the Electricity Act 1989.		
Electricity Distributor	Any person who is authorised by an Electricity Distribution Licence to distribute electricity.		
Embedded LDNO	This refers to an LDNO operating a distribution network which is embedded within another distribution network.		
Embedded Network	An electricity Distribution System operated by an LDNO and embedded within another distribution network.		
Entry Point	A boundary point at which electricity is exported onto a Distribution System from a connected installation or from another Distribution System, not forming part of the total system (boundary point and total system having the meaning given to those terms in the BSC).		
Exit Point	Distrib the Dis	ution System to the Customer's stribution System of another pe	
Extra-High Voltage (EHV)		al voltages of 22kV and above	
Gas and Electricity Markets	As est	ablished by the Utilities Act 200	00.
Authority (GEMA)			

Revision S3 Page 22 of 30 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Security Classification: Public



Grid Supply Point (GSP)  A metered connection between the National Grid Electricity Transmission system and the licenses's distribution system at which electricity flows to or from the Distribution System.  A distinct electrical system that is supplied from one or more GSPs for which total supply into the GSP group can be determined for each half hour.  Nominal voltages of at least 1kV and less than 22kV.  Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover cannot be made available on demand. These include (but not limited to) wind, tidal, wave, photovoltaic and small hydro.  Invalid Settlement Combination  A Settlement combination that is not recognised as a valid combination in market domain data: see https://www.elexonportal.co.uk/MDDVIEWER.  KVA  Kilovolt amperes.  KVAh  Kilovolt amperes.  KWM  Kilowatt.  KWM  Kilowatt.  KWM  Kilowatt.  KWM  Kilowatt.  Kilowatt hour (equivalent to one "unit" of electricity).  The holder of a licence in respect of distribution activities in Great Britain.  Operator (LDNO)  Line Loss Factor (LLF)  The factor that is used in Settlement to adjust the metering system volumes to take account of losses on the Distribution System.  An identifier assigned to an SVA metering system which is used to assign the LLF and use of system charges.  Load Factor  Low Voltage (LV)  Market Domain Data (MDD)  Maximum Export Capacity  (MEC)  Maximum Export Capacity  (MEC)  The MC of apparent power expressed in kVA that has been agreed can flow through the entry point to the Distribution System to the Customer's installation as specified in the connection agreement.  The MIC of apparent power expressed in kVA that has been agreed can flow through the entry point to the Distribution System to the Customer's installation as specified in the connection agreement.  **Measurement class B – non-half-hourly metering equipment; of Measurement class B – non-half-hourly metering equipment at or above 100kW premises, and from 5 November 2015,	Term	Definition
system and the licensee's distribution system at which electricity flows to or from the Distribution System.  A distinct electrical system that is supplied from one or more GSPs for which total supply into the GSP group can be determined for each half hour.  Nominal voltages of at least 1kV and less than 2kV.  Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover cannot be made available on demand. These include (but not limited to) wind, tidad, wave, photovoltals and small hydro.  Invalid Settlement Combination  A Settlement combination that is not recognised as a valid combination in market domain data - see https://www.elexonportal.co.uk/MDDVIEWER.  KVA  Kilovolt amperes  KVA  Kilovolt ampere reactive hour.  KW  Kilowatt.  KWM  Kilowatt.  KWM  Kilowatt.  KWM  Kilowatt.  KWM  Kilowatt.  KWM  The holder of a licence in respect of distribution activities in Great Britain.  Operator (LDNO)  Line Loss Factor (LLF)  The factor that is used in Settlement to adjust the metering system volumes to take account of losses on the Distribution System.  An identifier assigned to an SVA metering system which is used to assign the LLF and use of system charges.  Load Factor  Low Voltage (LV)  Market Domain Data (MDD)  Mominal voltages below TkV.  MDD is a central repository of reference data available to all Users involved in Settlement. It is essential to the operation of SVA trading arrangements.  Maximum Import Capacity  (MCC)  The MEC of apparent power expressed in kVA that has been agreed can flow through the entry point to the Distribution System from the Customer's installation as specified in the connection agreement.  The MC of apparent power expressed in kVA that has been agreed can flow through the entry point to the Distribution System to the SC which indicates how consumption is measured, Le::  • Measurement class A – non-half-hourly unmetered supplies; and weasurement class B – half-hourly unmetered supplies; and weasurement class C – half-hourly		
A distinct electrical system that is supplied from one or more GSPs for which total supply into the GSP group can be determined for each half hour.  Nominal voltages of at least 1kV and less than 22kV.  Intermittent Generation Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover cannot be made available on demand. These include (but not limited to) wind, tidal, wave, photovoltals and small hydro.  A Settlement Combination A Settlement Combination that is not recognised as a valid combination in market domain data - see https://www.elexonportal.co.uk/MDDVIEWER.  KIVA Kilovolt amperes.  KVAn Kilovolt amperes active hour.  KIW Kilowatt.  KIW Kilowatt.  KIW Kilowatt.  KIROWatt hour (equivalent to one "unit" of electricity).  The holder of a licence in respect of distribution activities in Great Britain.  Operator (LDNO)  The factor that is used in Settlement to adjust the metering system volumes to take account of losses on the Distribution System.  An identifier assigned to an SVA metering system which is used to assign the LLE and use of system charges.  Load Factor = [annual consumption (kWh)] / [maximum demand (kW) x hours in year]  Nominal voltages below 1kV.  MDD is a central repository of reference data available to all Users involved in Settlement. It is essential to the operation of SVA trading arrangements.  Maximum Import Capacity (MICC)  Meximum Import Capacity (MICC	, , , , , , , , , , , , , , , , , , , ,	
which total supply into the GSP group can be determined for each half hour.  High Voltage (HV)  Nominal voltages of at least 1kV and less than 22kV.  Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover cannot be made available on demand. These include (but not limited to) wind, tidal, wave, photovoltaic and small hydro.  A Settlement Combination  A Settlement Combination in market domain data - see https://www.elexonportal.co.uk/MDDVIEWER.  KVA  Kilovolt amperes.  KVAh  Kilovolt ampere reactive hour.  KW  Kilowatt hour (equivalent to one "unit" of electricity).  The holder of a licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  The hold of licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  The holder of a licence in respect of distribution activities in Great Britain.  Maximum Export Class (LLFC)  Maximum Export Capacity (MEC)  MoDi is a central repository of reference data available to all Users involved in Settlement. It is essential to the operation of SVA tradi		or from the Distribution System.
High Voltage (HV) Intermittent Generation Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover cannot be made available on demand. These include (but not limited to) wind, tidal, wave, photovoltaic and small hydro.  Invalid Settlement Combination A Settlement combination that is not recognised as a valid combination in market domain data - see https://www.elexonportal.co.uk/MDDVIEWER.  KVA Kilovolt amperes KVArh Kilovolt ampere reactive hour.  KW Kilowatt.  KWM Kilowatt.  KWM Kilowatt.  KWM Kilowatt.  KWM Kilowatt.  KWM Kilowatt hour (equivalent to one "unit" of electricity).  Licensed Distribution Network Operator (LDNO)  Line Loss Factor Class (LLFC) The factor that is used in Settlement to adjust the metering system volumes to take account of losses on the Distribution System.  An identifier assigned to an SVA metering system which is used to assign the LLF and use of system charges.  Load Factor  Low Voltage (LV) Moritage (LV) Market Domain Data (MDD)  Maximum Export Capacity (MCC)  Maximum Export Capacity (MCC)  The MEC of apparent power expressed in kVAt that has been agreed can flow through the exit point from the Distribution System from the Customer's installation as specified in the connection agreement.  A classification of metering systems used in the BSC which indicates how consumption is measured, l.e.:  Measurement class B – non-half-hourly unmetered supplies; and Measurement class B – half-hourly metering equipment at or above 100kW premises;  Measurement class B – half-hourly metering equipment at below 100kW premises, and from 5 November 2015, with current transformer.  Measurement class G – half-hourly metering equipment at below 100kW premises, and from 5 November 2015, with current transformer or whole current, and at domestic premises with current transformer or or whole current, and at domestic premises with current transformer or or included to incomp	GSP group	
High Voltage (HV) Intermittent Generation Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover cannot be made available on demand. These include (but not limited to) wind, tidal, wave, photovoltaic and small hydro.  A Settlement Combination A Settlement Combination in market domain data - see https://www.elexonportal.co.uk/MDDVIEWER.  kVA Kilovolt amperes.  kVA Kilovolt ampere reactive hour.  kW Kilowatt.  KWh Kilowatt.  KWh Kilowatt hour (equivalent to one "unit" of electricity).  Licensed Distribution Network Operator (LDNO) The holder of a licence in respect of distribution activities in Great Britain. Operator (LDNO) The factor that is used in Settlement to adjust the metering system volumes to take account of losses on the Distribution System.  Line Loss Factor Class (LLFC) An identifier assigned to an SVA metering system which is used to assign the LLF and use of system charges.  Load Factor Low Voltage (LV) Mominal voltages below TkV.  Market Domain Data (MDD)  Maximum Export Capacity (MEC)  Maximum Export Capacity (MEC)  Measurement Class  Measurement Class  A classification of metering systems used in kVA that has been agreed can flow through the entry point to the Distribution System from the Customer's installation as specified in the connection agreement.  Measurement Class B – non-half-hourly unmetered supplies; Measurement class A – non-half-hourly unmetered supplies; Measurement class B – non-half-hourly unmetered supplies; Measurement class B – half-hourly metering equipment at or above 100kW premises, and from 5 November 2015, with current transformer.  Measurement class G – half-hourly metering equipment at or above 100kW premises, and from 5 November 2015, with current transformer.  Measurement class G – half-hourly metering equipment at below 100kW premises, and from 5 November 2015, with current transformer.  Measurement class G – half-hourly metering equipment at below 100kW premises with whole current and not at domestic premises.  Meter Timeswitch		
Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover cannot be made available on demand. These include (but not limited to) wind, tidal, wave, photovotaic and small hydro.  A Settlement combination that is not recognised as a valid combination in market domain data - see https://www.elexonportal.co.uk/MDDVIEWER.  KVA Kilovott ampere reactive hour.  KW Kilowatt.  KWM Kilowatt.  KWM Kilowatt with the metering system volumes to take account of losses on the Distribution activities in Great Britain.  Defined on State of the state of th		
source of the prime mover cannot be made available on demand. These include (but not limited to) wind, tidal, wave, photovoltaic and small hydro. A Settlement combination that is not recognised as a valid combination in market domain data - see https://www.elexonportal.co.uk/MDDVIEWER. KIAVA Kilovolt amperes.  kVAA Kilovolt amperes eactive hour.  kW Kilovolt mayeres.  kWA Kilovolt mayeres.  for helder of a licence in respect of distribution activities in Great Britain.  Defeat Britain.  The holder of a licence in respect of distribution activities in Great Britain.  Defeat Britain.  The holder of a licence in respect of distribution activities in Great Britain.  Defeat Britain.  A identifier assigned to an SVA metering system which is used to assign the LLF and use of system charges.  Load Factor  a janual consumption (kWh]) j. [maximum demand (kW) x hours in year].  Nominal voltages below 1kV.  Market Domain Data (MDD)  Maximum Export Capacity  (MEC)  The MEC of apparent power expressed in kVA that has been agreed can flow through the entry point to the Distribution System from the Customer's installation as specified in the connection agreement.  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  Measurement class A – non-half-hourly unmetered supplies;  Measurement class B – half-hourly metering equipment at below 100kW premises,  Measurement class F – half hourly metering equipment at domes		· · · · · · · · · · · · · · · · · · ·
include (but not limited to) wind, tidal, wave, photovoltaic and small hydro.  A Settlement combination that is not recognised as a valid combination in market domain data - see https://www.elexonportal.co.uk/MDDVIEWER.  KVA Kilovolt amperes.  KVA Kilovolt ampere reactive hour.  KW Kilowatt Kilowatt thour (equivalent to one "unit" of electricity).  Licensed Distribution Network Operator (LDNO)  Line Loss Factor (LLF)  Line Loss Factor Class (LLFC)  Line Loss Factor Class (LLFC)  Line Loss Factor Class (LLFC)  An identifier assigned to an SVA metering system which is used to assign the LLF and use of system charges.  Load Factor  Low Voltage (LV)  Market Domain Data (MDD)  Measurement Class (L-Fc)  Measurement C	Intermittent Generation	
Invalid Settlement Combination  A Settlement combination that is not recognised as a valid combination in market domain data - see https://www.elexonportal.co.uk/MDDVIEWER.  kVA  Kilovolt amperes.  KVAh  Kilovolt ampere reactive hour.  Kilowatt.  Kilowatt Kilowatt.  Kilowatt may reactive hour.  Kilowatt hour (equivalent to one "unit" of electricity).  The holder of a licence in respect of distribution activities in Great Britain.  Description of the modern of a licence in respect of distribution system.  Line Loss Factor (LLF)  The factor that is used in Settlement to adjust the metering system volumes to take account of losses on the Distribution System.  Load Factor  Load Factor  Load Factor  Low Voltage (LV)  Market Domain Data (MDD)  Market Domain Data (MDD)  Maximum Export Capacity  (MEC)  Maximum Export Capacity  (MEC)  Maximum Export Capacity  (MCC)  Meximum Export Capacity  (MIC)  Meximum Import Capacity  (MIC)  Meximum Import Capacity  (MIC)  Meximum Import Capacity  (MIC)  Measurement Class  A classification of metering system in kVA that has been agreed can flow through the entry point to the Distribution System from the Customer's installation as specified in the connection agreement.  The MIC of apparent power expressed in kVA that has been agreed can flow through the entry point from the Distribution System to the Customer's installation as specified in the connection agreement.  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  Measurement class B – non-half-hourly unmetered supplies;  Measurement class B – non-half-hourly metering equipment;  Measurement class B – half-hourly metering equipment at below 100kW premises, and from 5 November 2015, with current transformer.  Measurement class B – half-hourly metering equipment at below 100kW premises, and from 5 November 2015, with current transformer or whole current, and at domestic premises  Meter Timeswitch Code (MTC)  Meter Timeswitch Code (MTC)  Metering Point  Metering Point  Metering Poi		
market domain data - see https://www.elexonportal.co.uk/MDDVIEWER. kVAh Kilovolt amperes. kWah Kilovolt ampere reactive hour. kW Kilowatt. kWh Kilowatt. koperator (LDNO) Line Loss Factor (LLF) The holder of a licence in respect of distribution activities in Great Britain. Description of the time to adjust the metering system volumes to take account of losses on the Distribution System. An identifier assigned to an SVA metering system which is used to assign the LLF and use of system charges. Load Factor = [annual consumption (kWh)] / [maximum demand (kW) x hours in year] Nominal voltages below 1kV. Market Domain Data (MDD) Market Domain Data (MDD) Makimum Export Capacity (MEC) Maximum Export Capacity (MEC) The MEC of apparent power expressed in kVA that has been agreed can flow through the entry point to the Distribution System from the Customer's installation as specified in the connection agreement.  Maximum Import Capacity (MIC) Measurement Class  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  • Measurement class A – non-half-hourly metering equipment; • Measurement class B – non-half-hourly unmetered supplies; • Measurement class B – half-hourly metering equipment at or above 100kW premises; • Measurement class F – half hourly metering equipment at below 100kW premises; • Measurement class G – half-hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  Meter Timeswitch Code (MTC)  Metering Point  Metering Point  Metering Point  Metering Point	Invalid Cattlement Cambination	
KVArh   Kilovolt amperes	Invalid Settlement Combination	
KWArh   Kilowatt Ampere reactive hour.	kVΔ	
Kilowatt		
Kilowatt hour (equivalent to one "unit" of electricity).   Licensed Distribution Network Operator (LDNO)   Line Loss Factor (LLF)		· · · · · · · · · · · · · · · · · · ·
Licensed Distribution Network Operator (LDNO)  Ine Loss Factor (LLF)  The factor that is used in Settlement to adjust the metering system volumes to take account of losses on the Distribution System.  Line Loss Factor Class (LLFC)  An identifier assigned to an SVA metering system which is used to assign the LLF and use of system charges.  Load Factor  Load Factor  = [annual consumption (kWh)] / [maximum demand (kW) x hours in year]  Nominal voltages below 1kV.  Market Domain Data (MDD)  Maximum Export Capacity (MEC)  Maximum Export Capacity (MIC)  Maximum Import Capacity (MIC)  Measurement Class  A classification of metering systems used in the Connection agreement.  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  Measurement class A – non-half-hourly unmetered supplies;  Measurement class B – non-half-hourly unmetered supplies;  Measurement class B – half-hourly unmetered supplies; and  Measurement class C – half-hourly metering equipment at or above 100kW premises;  Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  Meter Timeswitch Code (MTC)  Metering Point  The point at which electricity that is exported to or imported from the  The point at which electricity that is exported to or imported from the  The point at which electricity that is exported to or imported from the		
Digital Contents   C		
Line Loss Factor (LLF)  The factor that is used in Settlement to adjust the metering system volumes to take account of losses on the Distribution System.  Line Loss Factor Class (LLFC)  An identifier assigned to an SVA metering system which is used to assign the LLF and use of system charges.  Load Factor  = [annual consumption (kWh)] / [maximum demand (kW) x hours in year]  Low Voltage (LV)  Market Domain Data (MDD)  Market Domain Data (MDD)  Maximum Export Capacity (MEC)  Maximum Export Capacity (MEC)  Maximum Import Capacity (MIC)  Maximum Import Capacity (MIC)  Maximum Import Capacity (MIC)  Measurement Class  A classification of metering system sused in kVA that has been agreed can flow through the exit point from the Distribution System from the Customer's installation as specified in the connection agreement.  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  • Measurement class A – non-half-hourly metering equipment;  • Measurement class B – non-half-hourly unmetered supplies;  • Measurement class B – half-hourly unmetered supplies;  • Measurement class B – half-hourly metering equipment at or above 100kW premises;  • Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.  • Measurement class G – half-hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  • Measurement class G – half hourly met		The holder of a licence in respect of distribution activities in creat britain.
Volumes to take account of losses on the Distribution System.		The factor that is used in Settlement to adjust the metering system
Line Loss Factor Class (LLFC)  An identifier assigned to an SVA metering system which is used to assign the LLF and use of system charges.  I Load Factor  E annual consumption (kWh)) / [maximum demand (kW) x hours in year]  Nominal voltages below 1kV.  Market Domain Data (MDD)  Market Domain Data (MDD)  Maximum Export Capacity (MEC)  Maximum Export Capacity (MEC)  Maximum Import Capacity (MIC)  Measurement Capacity (MIC)  Measurement Capacity (MIC)  Measurement Class  A classification of metering systems used in the Content on agreement.  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  Measurement class A – non-half-hourly metering equipment;  Measurement class B – non-half-hourly unmetered supplies;  Measurement class B – half-hourly unmetered supplies;  Measurement class C – half-hourly unmetered supplies; and  Measurement class E – half-hourly metering equipment at or above 100kW premises, and from 5 November 2015, with current transformer.  Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises of the premise of		
the LLF and use of system charges.    Load Factor	Line Loss Factor Class (LLFC)	
Nominal voltages below 1kV.		the LLF and use of system charges.
Maximum Export Capacity (MEC)  Maximum Import Capacity (MEC)  Maximum Import Capacity (MIC)  Maximum Import Capacity (MIC)  Maximum Import Capacity (MIC)  The MIC of apparent power expressed in kVA that has been agreed can flow through the entry point to the Distribution System from the Customer's installation as specified in the connection agreement.  The MIC of apparent power expressed in kVA that has been agreed can flow through the exit point from the Distribution System to the Customer's installation as specified in the connection agreement.  Measurement Class  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  • Measurement class A – non-half-hourly metering equipment; • Measurement class B – non-half-hourly unmetered supplies; • Measurement class D – half-hourly unmetered supplies; • Measurement class D – half-hourly unmetered supplies; and • Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.  • Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the		= [annual consumption (kWh)] / [maximum demand (kW) x hours in year]
involved in Settlement. It is essential to the operation of SVA trading arrangements.  The MEC of apparent power expressed in kVA that has been agreed can flow through the entry point to the Distribution System from the Customer's installation as specified in the connection agreement.  Maximum Import Capacity (MIC)  The MIC of apparent power expressed in kVA that has been agreed can flow through the exit point from the Distribution System to the Customer's installation as specified in the connection agreement.  Measurement Class  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  • Measurement class A – non-half-hourly metering equipment;  • Measurement class C – half-hourly unmetered supplies;  • Measurement class C – half-hourly unmetered supplies; and  • Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.  • Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  The point at which electricity that is exported to or imported from the		
Maximum Export Capacity (MEC)  The MEC of apparent power expressed in kVA that has been agreed can flow through the entry point to the Distribution System from the Customer's installation as specified in the connection agreement.  The MIC of apparent power expressed in kVA that has been agreed can flow through the exit point from the Distribution System to the Customer's installation as specified in the connection agreement.  Measurement Class  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  • Measurement class A – non-half-hourly metering equipment;  • Measurement class B – non-half-hourly unmetered supplies;  • Measurement class C – half-hourly metering equipment at or above 100kW premises;  • Measurement class D – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.  • Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the	Market Domain Data (MDD)	
Maximum Export Capacity (MEC)  The MEC of apparent power expressed in kVA that has been agreed can flow through the entry point to the Distribution System from the Customer's installation as specified in the connection agreement.  The MIC of apparent power expressed in kVA that has been agreed can flow through the exit point from the Distribution System to the Customer's installation as specified in the connection agreement.  Measurement Class  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  Measurement class A – non-half-hourly metering equipment;  Measurement class B – non-half-hourly unmetered supplies;  Measurement class D – half-hourly metering equipment at or above 100kW premises;  Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.  Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the		·
flow through the entry point to the Distribution System from the Customer's installation as specified in the connection agreement.  Maximum Import Capacity (MIC)  The MIC of apparent power expressed in kVA that has been agreed can flow through the exit point from the Distribution System to the Customer's installation as specified in the connection agreement.  Measurement Class  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  Measurement class A – non-half-hourly metering equipment;  Measurement class B – non-half-hourly unmetered supplies;  Measurement class C – half-hourly metering equipment at or above 100kW premises;  Measurement class D – half-hourly unmetered supplies; and  Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.  Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the		
Customer's installation as specified in the connection agreement.  Maximum Import Capacity (MIC)  The MIC of apparent power expressed in kVA that has been agreed can flow through the exit point from the Distribution System to the Customer's installation as specified in the connection agreement.  Measurement Class  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  Measurement class A – non-half-hourly metering equipment;  Measurement class B – non-half-hourly unmetered supplies;  Measurement class C – half-hourly metering equipment at or above 100kW premises;  Measurement class D – half-hourly unmetered supplies; and  Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.  Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the		
Maximum Import Capacity (MIC)  The MIC of apparent power expressed in kVA that has been agreed can flow through the exit point from the Distribution System to the Customer's installation as specified in the connection agreement.  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  • Measurement class A – non-half-hourly metering equipment;  • Measurement class B – non-half-hourly unmetered supplies;  • Measurement class C – half-hourly unmetered supplies; and  • Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.  • Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  Metering Point  The point at which electricity that is exported to or imported from the	(MEC)	
flow through the exit point from the Distribution System to the Customer's installation as specified in the connection agreement.  Measurement Class  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  • Measurement class A – non-half-hourly metering equipment;  • Measurement class B – non-half-hourly unmetered supplies;  • Measurement class C – half-hourly metering equipment at or above 100kW premises;  • Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.  • Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the	Maximum Import Canacity	
installation as specified in the connection agreement.  A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  • Measurement class A – non-half-hourly metering equipment;  • Measurement class B – non-half-hourly unmetered supplies;  • Measurement class C – half-hourly metering equipment at or above 100kW premises;  • Measurement class D – half-hourly unmetered supplies; and  • Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.  • Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the		
A classification of metering systems used in the BSC which indicates how consumption is measured, i.e.:  Measurement class A – non-half-hourly metering equipment; Measurement class B – non-half-hourly unmetered supplies; Measurement class C – half-hourly metering equipment at or above 100kW premises; Measurement class D – half-hourly unmetered supplies; and Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.  Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the	(Wile)	
consumption is measured, i.e.:  Measurement class A – non-half-hourly metering equipment; Measurement class B – non-half-hourly unmetered supplies; Measurement class C – half-hourly metering equipment at or above 100kW premises; Measurement class D – half-hourly unmetered supplies; and Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.  Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the	Measurement Class	
<ul> <li>Measurement class A – non-half-hourly metering equipment;</li> <li>Measurement class B – non-half-hourly unmetered supplies;</li> <li>Measurement class C – half-hourly metering equipment at or above 100kW premises;</li> <li>Measurement class D – half-hourly unmetered supplies; and</li> <li>Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.</li> <li>Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises</li> <li>Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises</li> <li>Meter Timeswitch Code (MTC)</li> <li>MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.</li> <li>Metering Point</li> <li>The point at which electricity that is exported to or imported from the</li> </ul>		
Measurement class B – non-half-hourly unmetered supplies;     Measurement class C – half-hourly metering equipment at or above 100kW premises;     Measurement class D – half-hourly unmetered supplies; and     Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.      Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises     Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  Metering Point  Metering equipment at or above the current and not at domestic premises.  Metering Point  Metering Point  Metering Point  Metering equipment at or above the current and and at domestic premises.  Metering Point  Metering Point  Metering Point  Metering equipment at or above the current and not at domestic premises.  Metering Point  Metering Point  Metering Point		·
<ul> <li>Measurement class C – half-hourly metering equipment at or above 100kW premises;</li> <li>Measurement class D – half-hourly unmetered supplies; and</li> <li>Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.</li> <li>Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises</li> <li>Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises</li> <li>Meter Timeswitch Code (MTC)</li> <li>MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.</li> <li>Metering Point</li> <li>The point at which electricity that is exported to or imported from the</li> </ul>		· · · · · · · · · · · · · · · · · · ·
Measurement class D – half-hourly unmetered supplies; and     Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.      Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises     Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  Metering Point		
Measurement class E – half-hourly metering equipment below 100kW premises, and from 5 November 2015, with current transformer.      Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises     Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  Metering Point		above 100kW premises;
100kW premises, and from 5 November 2015, with current transformer.  • Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the		<ul> <li>Measurement class D – half-hourly unmetered supplies; and</li> </ul>
transformer.  • Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the		
Measurement class F – half hourly metering equipment at below 100kW premises with current transformer or whole current, and at domestic premises     Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  Metering Point  Metering Point		
100kW premises with current transformer or whole current, and at domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the		
domestic premises  • Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the		
Measurement class G – half hourly metering equipment at below 100kW premises with whole current and not at domestic premises  Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  Metering Point  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point		
Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the		·
Meter Timeswitch Code (MTC)  MTCs are three digit codes allowing suppliers to identify the metering installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the		
installed in Customers' premises. They indicate whether the meter is single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point  The point at which electricity that is exported to or imported from the	Meter Timeswitch Code (MTC)	
single or multi-rate, pre-payment or credit, or whether it is 'related' to another meter. Further information can be found in MDD.  Metering Point The point at which electricity that is exported to or imported from the	motor rangement code (WTO)	
another meter. Further information can be found in MDD.  Metering Point The point at which electricity that is exported to or imported from the		
Metering Point The point at which electricity that is exported to or imported from the		
licensee's Distribution System is measured is deemed to be measured or	Metering Point	
		licensee's Distribution System is measured, is deemed to be measured, or
is intended to be measured and which is registered pursuant to the		is intended to be measured and which is registered pursuant to the

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 23 of 30



metering Point Administration Number (MPAN)  Metering Point Administration Number (MPAN)  Metering System  Metering System  Metering System  Metering System  Metering System Identifier (MSID)  Master Registration Agreement (MRA)  Mester Registration Agreement (MRA)  Nested Networks  Metering System  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the genera can choose when to operate, and prover (CHP)  Ofgem  Discussions of the MRA. For the purposes of this statement, GSPs are not 'metering points'.  Also known Supply Number or S-Number and is a 21-digit number relation to a Metering Point under the MRA.  Commonly, only reference is made to the last 13 digits of the MPAN (als known as the 'Core Digits' or 'MPAN Core').  Particular commissioned metering equipment installed for the purposes measuring the quantities of exports and/or imports at the exit point or entry point.  MSID is a term used throughout the BSC and its subsidiary documents and has the same meaning as MPAN as used under the MRA.  The MRA is an Agreement that sets out terms for the provision of Metering Point Administration Services (MPAS) Registrations, and procedures in relation to the Change of Supplier to any premise/meterin point.  Nested Networks  This refers to a situation where there is more than one level of Embedde Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Office of Gas and Electricity Markets — Ofgem is governed by GEMA an is responsible for th	
Metering Point Administration Number (MPAN)       Also known Supply Number or S-Number and is a 21-digit number relati to a Metering Point under the MRA.         Commonly, only reference is made to the last 13 digits of the MPAN (als known as the 'Core Digits' or 'MPAN Core').         Metering System       Particular commissioned metering equipment installed for the purposes measuring the quantities of exports and/or imports at the exit point or entry point.         Metering System Identifier (MSID)       MSID is a term used throughout the BSC and its subsidiary documents and has the same meaning as MPAN as used under the MRA.         Master Registration Agreement (MRA)       The MRA is an Agreement that sets out terms for the provision of Metering Point Administration Services (MPAS) Registrations, and procedures in relation to the Change of Supplier to any premise/meterin point.         Nested Networks       This refers to a situation where there is more than one level of Embedde Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).         Non-Intermittent Generation       Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the genera can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)         Offgem       Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	
Number (MPAN)       to a Metering Point under the MRA.         Commonly, only reference is made to the last 13 digits of the MPAN (als known as the 'Core Digits' or 'MPAN Core').         Metering System       Particular commissioned metering equipment installed for the purposes measuring the quantities of exports and/or imports at the exit point or entry point.         Metering System Identifier (MSID)       MSID is a term used throughout the BSC and its subsidiary documents and has the same meaning as MPAN as used under the MRA.         Master Registration Agreement (MRA)       The MRA is an Agreement that sets out terms for the provision of Metering Point Administration Services (MPAS) Registrations, and procedures in relation to the Change of Supplier to any premise/meterin point.         Nested Networks       This refers to a situation where there is more than one level of Embedded Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).         Non-Intermittent Generation       Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)         Offgem       Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	
Commonly, only reference is made to the last 13 digits of the MPAN (als known as the 'Core Digits' or 'MPAN Core').  Metering System  Particular commissioned metering equipment installed for the purposes measuring the quantities of exports and/or imports at the exit point or entry point.  Metering System Identifier (MSID)  MSID is a term used throughout the BSC and its subsidiary documents and has the same meaning as MPAN as used under the MRA.  Master Registration Agreement (MRA)  The MRA is an Agreement that sets out terms for the provision of Metering Point Administration Services (MPAS) Registrations, and procedures in relation to the Change of Supplier to any premise/meterin point.  Nested Networks  This refers to a situation where there is more than one level of Embedded Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).  Non-Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Ofgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	ng
Metering System   Particular commissioned metering equipment installed for the purposes measuring the quantities of exports and/or imports at the exit point or entry point.    Metering System Identifier (MSID)	_
Metering System         Particular commissioned metering equipment installed for the purposes measuring the quantities of exports and/or imports at the exit point or entry point.           Metering System Identifier (MSID)         MSID is a term used throughout the BSC and its subsidiary documents and has the same meaning as MPAN as used under the MRA.           Master Registration Agreement (MRA)         The MRA is an Agreement that sets out terms for the provision of Metering Point Administration Services (MPAS) Registrations, and procedures in relation to the Change of Supplier to any premise/meterin point.           Nested Networks         This refers to a situation where there is more than one level of Embedde Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).           Non-Intermittent Generation         Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the genera can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)           Ofgem         Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	0
measuring the quantities of exports and/or imports at the exit point or entry point.  Metering System Identifier (MSID)  MSID is a term used throughout the BSC and its subsidiary documents and has the same meaning as MPAN as used under the MRA.  Master Registration Agreement (MRA)  The MRA is an Agreement that sets out terms for the provision of Metering Point Administration Services (MPAS) Registrations, and procedures in relation to the Change of Supplier to any premise/meterin point.  Nested Networks  This refers to a situation where there is more than one level of Embedde Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).  Non-Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Offeen  Office of Gas and Electricity Markets − Ofgem is governed by GEMA and	
entry point.  Metering System Identifier (MSID)  Master Registration Agreement (MRA)  Master Registration Agreement (MRA)  The MRA is an Agreement that sets out terms for the provision of Metering Point Administration Services (MPAS) Registrations, and procedures in relation to the Change of Supplier to any premise/meterin point.  Nested Networks  This refers to a situation where there is more than one level of Embedded Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).  Non-Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Offgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	of
Metering System Identifier (MSID)MSID is a term used throughout the BSC and its subsidiary documents and has the same meaning as MPAN as used under the MRA.Master Registration Agreement (MRA)The MRA is an Agreement that sets out terms for the provision of Metering Point Administration Services (MPAS) Registrations, and procedures in relation to the Change of Supplier to any premise/meterin point.Nested NetworksThis refers to a situation where there is more than one level of Embedde Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).Non-Intermittent GenerationDefined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)OfgemOffice of Gas and Electricity Markets – Ofgem is governed by GEMA an	
(MSID)       and has the same meaning as MPAN as used under the MRA.         Master Registration Agreement (MRA)       The MRA is an Agreement that sets out terms for the provision of Metering Point Administration Services (MPAS) Registrations, and procedures in relation to the Change of Supplier to any premise/meterin point.         Nested Networks       This refers to a situation where there is more than one level of Embedded Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).         Non-Intermittent Generation       Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)         Ofgem       Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	
Master Registration Agreement (MRA)  The MRA is an Agreement that sets out terms for the provision of Metering Point Administration Services (MPAS) Registrations, and procedures in relation to the Change of Supplier to any premise/meterin point.  Nested Networks  This refers to a situation where there is more than one level of Embedde Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).  Non-Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the genera can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Office of Gas and Electricity Markets − Ofgem is governed by GEMA an	
<ul> <li>(MRA) Metering Point Administration Services (MPAS) Registrations, and procedures in relation to the Change of Supplier to any premise/meterin point.</li> <li>Nested Networks This refers to a situation where there is more than one level of Embedded Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).</li> <li>Non-Intermittent Generation Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)</li> <li>Office of Gas and Electricity Markets – Ofgem is governed by GEMA and</li> </ul>	
procedures in relation to the Change of Supplier to any premise/meterin point.  Nested Networks  This refers to a situation where there is more than one level of Embedded Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).  Non-Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Ofgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	
point.  Nested Networks  This refers to a situation where there is more than one level of Embedded Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).  Non-Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Ofgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	
Nested Networks  This refers to a situation where there is more than one level of Embedded Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).  Non-Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Ofgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	g
Network and therefore nested Distribution Systems between LDNOs (e. host DNO → primary nested LDNO → secondary nested LDNO → customer).         Non-Intermittent Generation       Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)         Ofgem       Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	
host DNO → primary nested LDNO → secondary nested LDNO → customer).  Non-Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Ofgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	
Customer).  Non-Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Ofgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	g.
Non-Intermittent Generation  Defined in DCUSA Schedule 16 as a generation plant where the energy source of the prime mover can be available on demand, and the general can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Ofgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	
source of the prime mover can be available on demand, and the genera can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Ofgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	
can choose when to operate, and bring more benefits to the network if it runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Ofgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA and	
runs at times of high load. These include (but are not limited to) Combin Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Ofgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA an	
Cycle Gas Turbine (CCGT), gas generators, landfill, sewage, biomass, biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Ofgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA an	
biogas, energy crop, waste incineration and combined Heat and Power (CHP)  Ofgem  Office of Gas and Electricity Markets – Ofgem is governed by GEMA an	ea
(CHP) Ofgem Office of Gas and Electricity Markets – Ofgem is governed by GEMA an	
Office of Gas and Electricity Markets – Ofgem is governed by GEMA an	
	4
	u
Profile Class (PC)  A categorisation applied to NHH MPANs and used in Settlement to group	n
Customers with similar consumption patterns to enable the calculation of	
consumption profiles.	
Settlement The determination and settlement of amounts payable in respect of	
charges (including reconciling charges) in accordance with the BSC.	
Settlement Class (SC)  The combination of Profile Class, Line Loss Factor Class, Time Pattern	
Regime and Standard Settlement Configuration, by Supplier within a GS	3P
group and used for Settlement.	
Standard Settlement A standard metering configuration relating to a specific combination of	
Configuration (SSC) Time Pattern Regimes.	
Supercustomer The method of billing Users for use of system on an aggregated basis,	
grouping together consumption and standing charges for all similar NHI	1
metered Customers or aggregated HH metered Customers.	
Supercustomer DUoS Report	3
and units consumed.	
Supplier An organisation with a supply licence responsible for electricity supplied	to
and/or exported from a metering point.	
Supplier Volume Allocation As defined in the BSC. (SVA)	
Time Pattern Regime (TPR)  The pattern of switching behaviour through time that one or more meter	
registers follow.	
Unmetered Supplies Exit points deemed to be suitable as unmetered supplies as permitted in	ı
the Electricity (Unmetered Supply) Regulations 2001 and where operate	
in accordance with BSC procedure 520 <sup>11</sup> .	

 $<sup>^{11}\</sup> Balancing\ and\ Settlement\ Code\ Procedures\ are\ available\ from\ http://www.elexon.co.uk/pages/bscps.aspx$ 

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 24 of 30



Term	Definition
Use of System Charges	Charges which are applicable to those parties which use the Distribution
	System.
User	Someone that has a use of system agreement with the DNO e.g. a supplier, generator or other DNO.

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 25 of 30



# APPENDIX 2 - GUIDANCE NOTES<sup>12</sup>

## BACKGROUND

- The electricity bill from your Supplier contains an element of charge to cover electricity distribution costs. This distribution charge covers the cost of operating and maintaining a safe and reliable Distribution System that forms the 'wires' that transport electricity between the national transmission system and end users such as homes and businesses. Our Distribution System includes overhead lines, underground cables, as well as substations and transformers.
- 1.2. In most cases, your Supplier is invoiced for the distribution charge and this is normally part of your total bill. In some cases, (for example business users,) the supplier may pass through the distribution charge as an identifiable line item on the electricity bill.
- 1.3. Where electricity is generated at a property your Supplier may receive a credit for energy that is exported on to the Distribution System. These credits are intended to reflect that the exported generation may reduce the need for traditional demand led reinforcement of the Distribution System.
- 1.4. Understanding your distribution charges could help you reduce your costs and increase your credits. This is achieved by understanding the components of the charge to help you identify whether there may be opportunities to change the way you use the Distribution System.

### METER POINT ADMINISTRATION


- 1.5. We are responsible for managing the electricity supply points that are connected to our Distribution System. Typically every supply point is identified by a Meter Point Administration Number (MPAN). A few supply points may have more than one MPAN depending on the metering configuration (e.g. a school which may have an MPAN for the main supply and a MPAN for catering).
- 1.6. The full MPAN is a 21 digit number, preceded by an 'S'. The MPAN applicable to a supply point is found on the electricity bill from your Supplier. This number enables you to establish who your electricity distributor is, details of the characteristics of the supply and importantly the distribution charges that are applicable to your premise.
- 1.7. The 21-digit number is normally presented in two sections as shown in the following diagram. The top section is supplementary data which gives information about the characteristics of supply, while the bottom 'core' is the unique identifier.

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 26 of 30 Status: Issued

<sup>12</sup> These guidance notes are provided for additional information and do not form part of the application of charges.



### FULL MPAN DIAGRAM

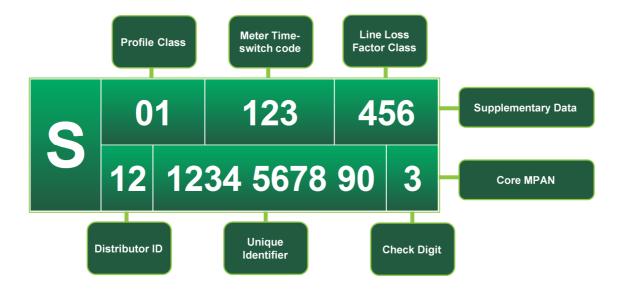

- 1.8. Generally, you will only need to know the Distributor ID and line loss factor class to identify the distribution charges for your premise. However, there are some premises where charges are specific to that site. In these instances the charges are identified by the core MPAN. The Distributor ID for **MPD** is 34. Other Distributor IDs can be referenced in the glossary.
- 1.9. Additionally it can be useful to understand the profile class provided in the supplementary data. The profile class will be a number between 00 and 08. The following list provides details of the allocation of profile classes to types of customers:
  - '01' Domestic customers with unrestricted supply
  - '02' Domestic customers with restricted load, for example off-peak heating
  - '03' Non-domestic customers with unrestricted supply
  - '04' Non-domestic customers with restricted load, for example off-peak heating
  - '05' Non-domestic maximum demand customers with a Load Factor of less than 20%
  - '06' Non-domestic maximum demand customers with a Load Factor between 20% and 30%
  - '07' Non-domestic maximum demand customers with a Load Factor between 30% and 40%
  - '08' Non-domestic maximum demand customers with a Load Factor over 40% or non-halfhourly metered generation customers
  - '00' Half-hourly metered demand and generation customers
- 1.10. Unmetered Supplies will be allocated to profile class 01, 08 and 00 depending on the type of load or the measurement method of the load.
- 1.11. The allocation of the profile class will affect your charges. If you feel that you have been allocated the wrong profile class, please contact your Supplier as they are responsible for this.

#### YOUR CHARGES

- All distribution charges that relate to our Distributor ID 34 are provided in this statement. 1.12.
- 1.13. You can identify your charges by referencing your PC, LLFC and SSC line loss factor class, from Annex 1. If the MPAN is for a Designated EHV Property then the charges will be found in Annex 2. In a few instances, the charges may be contained in Annex 3. When identifying charges in Annex 2,



- please note that some line loss factor classes have more than one charge. In this instance you will need to select the correct charge by cross referencing with the core MPAN provided in the table.
- 1.14. Once you have identified which charge structure applies to your MPAN then you will be able to calculate an estimate of your distribution charge using the calculator provided in the spreadsheet 'Schedule of charges and other tables' found in the sheet called 'Charge Calculator'. This spreadsheet can be downloaded from www.murphypowerdistribution.co.uk

### REDUCING YOUR CHARGES

- 1.15. The most effective way to reduce your energy charges is to reduce your consumption by switching off or using more energy efficient appliances. However, there are also other potential opportunities to reduce your distribution charges; for example, it may be beneficial to shift demand or generation to a better time period. Demand use is likely to be cheaper outside peak periods and generation credits more beneficial, although the ability to directly benefit will be linked to the structure of your supply charges.
- 1.16. The calculator mentioned above provides the opportunity to establish a forecast of the change in distribution charges that could be achieved if you are able to change any of the consumption related inputs.

### REACTIVE POWER AND REACTIVE POWER CHARGES

- 1.17. Reactive power is a separately charged component of connections that are half-hourly metered. Reactive power charges are generally avoidable if 'best practice' design of the properties' electrical installation has been provided in order to maintain a power factor between 0.95 and unity at the Metering Point.
- 1.18. Reactive Power (kVArh) is the difference between working power (active power measured in kW) and total power consumed (apparent power measured in kVA). Essentially it is a measure of how efficiently electrical power is transported through an electrical installation or a Distribution System.
- 1.19. Power flowing with a power factor of unity results in the most efficient loading of the Distribution System. Power flowing with a power factor of less than 0.95 results in much higher losses in the Distribution System, a need to potentially provide higher capacity electrical equipment and consequently a higher bill for you the consumer. A comparatively small improvement in power factor can bring about a significant reduction in losses since losses are proportional to the square of the current.
- 1.20. Different types of electrical equipment require some 'reactive power' in addition to 'active power' in order to work effectively. Electric motors, transformers and fluorescent lighting, for example, may produce poor power factors due to the nature of their inductive load. However, if good design practice is applied then the poor power factor of appliances can be corrected as near as possible to source. Alternatively poor power factor can be corrected centrally near to the meter.
- 1.21. There are many advantages that can be achieved by correcting poor power factor. These include: reduced energy bills through lower reactive charges, lower capacity charges and reduced power consumption and reduced voltage drop in long cable runs.

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 28 of 30



## SITE-SPECIFIC EDCM CHARGES

- A site classified as a Designated EHV Property is subject to a locational based charging methodology (referred to as EDCM) for higher voltage network users. Distributors use two approved approaches:
  - Long Run Incremental Cost Pricing (LRIC)
  - Forward Cost Pricing (FCP)

MPD follow whichever method is utilised by the relevant distributor in their Distribution Service Area. The EDCM will apply to Customers connected at Extra High Voltage or connected at High Voltage and metered at a high voltage substation.

- 1.23. EDCM charges are site-specific, reflecting the degree to which the local and higher voltage networks have the capacity to serve more demand or generation without the need to upgrade the electricity infrastructure. The charges also reflect the networks specifically used to deliver the electricity to the site as well as the usage at the site. Generators with non-intermittent output and deemed to be providing beneficial support to our networks may qualify to receive payment.
- 1.24. The charges under the EDCM comprise of the following individual components:
  - a) Fixed charge This charge recovers operational costs associated with those connection assets that are provided for the 'sole' use of the customer. The value of these assets is used as a basis to derive the charge.
  - b) Capacity charge (pence/kVA/day) -This charge comprises the relevant LRIC/FCP component, the National Grid Electricity Transmission cost and other regulated costs. Capacity charges are levied on the MIC, MEC, and any exceeded capacity. You may wish to review your MIC or MEC periodically to ensure it remains appropriate for your needs as you may be paying for more capacity than you require. If you wish to make changes contact us via the details in this statement.

The LRIC/FCP cost is locational and reflects our assessment of future network reinforcement necessary at voltage of connection (local) and beyond at all higher voltages (remote) relevant to the customer's connection. This results in the allocation of higher costs in more capacity congested parts of the network reflecting the greater likelihood of future reinforcement in these areas, and the allocation of lower costs in less congested parts of the network. The local LRIC/FCP cost is included in the capacity charge.

Our regulated costs include direct and indirect operational costs and a residual amount to ensure recovery of our regulated allowed revenue. The capacity charge recovers these costs using the customer usage profile and the relevant assets being used to transport electricity between the source substation and customer's Metering Point.

- c) Super-red unit charge (pence/kWh) -This charge recovers the remote LRIC/FCP component. The charge is positive for import and negative for export which means you can either reduce your charges by minimising consumption or increasing export at those times. The charge is applied on consumption during the Super-red time period as detailed in Annex 2.
- 1.25. Future charge rates may be affected by consumption during the Super-red period. Therefore reducing consumption in the Super-red time period may be beneficial.
- 1.26. Reactive Power -The EDCM does not include a separate charge component for any reactive power flows (kVAr) for either demand or generation. However, the EDCM charges do reflect the effect on the network of the customer's power factor, for example unit charges can increase if your site power factor is poor (lower than 0.95). Improving your site's power factor will also reduce the maximum demand (kVA) for the same power consumed in kW thus providing scope to reduce your agreed capacity requirements.

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 29 of 30 Security Classification: Public



- Annex 1 Schedule of Charges for use of the Distribution System by LV and HV Designated Properties
- Annex 2 Schedule of Charges for use of the Distribution System by Designated EHV Properties (including LDNOs with Designated EHV Properties/end-users).
  - **MPD** does not have any customers connected at EHV at this time.
- Annex 3 Schedule of Charges for use of the Distribution System to Preserved/Additional LLFC Classes

  MPD does not have any customers on preserved tariffs.
- **Annex 4 -** Charges applied to LDNOs with HV/LV end users
- **Annex 5 -** Schedule of Line Loss Factors
- Annex 6 Un-scaled [nodal /network group] costs

As **MPD** operates across all DNO areas, spreadsheets for the Annexes detailed above have been created for each DNO area, and are available to download from <a href="http://www.murphypowerdistribution.co.uk">http://www.murphypowerdistribution.co.uk</a>

This document is also available by contacting us at the address in this document or via email to powerdistribution@murphygroup.co.uk.

Revision S3 Document Number: N2-JMS-ZZ-XX-PD-Z-0213 Page 30 of 30